

THERMAL ASSESSMENT SAFETY SHEET

Please provide all the information below to facilitate an accurate assessment.

Date:

Company Name:

Contact Name:

Location of project:

Project reference:.....

Glass size: MaxX

Type of glazing: Single IGU (Insulated glass unit)

Glazing type: Structural, 2 sided Captive, 4 sided

Glass description (E.g. Thickness, tinted, low-E, make-up etc):

.....

IGU:

Glass description:


External surface:

Internal Surface:

Air space:

Shading: Overhangs:mm

Mullion depthmm

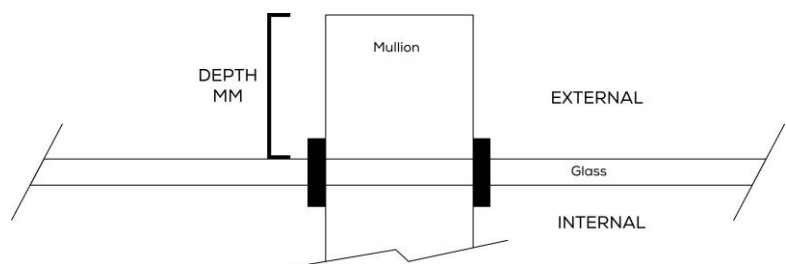

Blinds / Drapes / Back up walls:

- No blinds or drapes
- Blinds / Drapes
- Venetian between glasses (IGU)
- Back up walls

Blinds / Drapes:

Colour: Light Dark

Ventilated*: Yes No

*To be considered ventilated, there must be a min 50mm space between the glass and blind and at least 50mm gap at the top and bottom of the blind

Venetian blind between glasses: Yes No

Colour Light Dark

Back up walls: Ventilated space Yes No

Distance glass to wall:mm

- Frame type:**
- Concrete Wooden
 - Plastic Rubber
 - Metal – light colour
 - Metal – light colour with thermal barrier
 - Metal – dark colour
 - Metal – dark colour with thermal barrier

Signed:

Print name: